



PLAN VIEW OF ROLLER SHUTTER

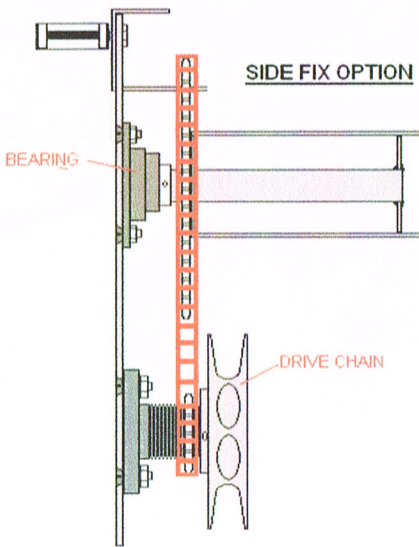

SIDE FIX OPTION

ENDPLATE SIZES		
HEIGHT	A	B
2000MM - 3000MM	305MM	458MM
3001MM - 4000MM	355MM	458MM
4001MM - 4600MM	458MM	458MM


ONLY SUITABLE FOR SHUTTERS UP TO 13 SQ METRS.
SHUTTERS BIGGER THEN 13 SQ METRS WILL REQUIRE
HEAVIER DUTY TUBE AND DOUBLE REDUCTION GEARS.

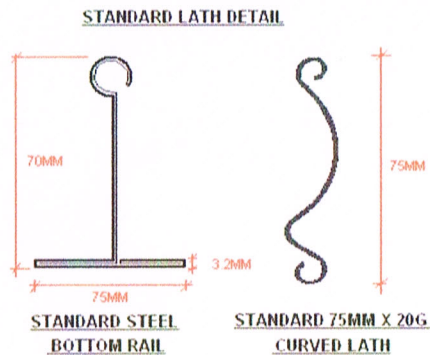

2.52KG PER MTR

12KG PER MTR SQ

OTHER LATH TYPES AVAILABLE. CONTACT OFFICE FOR DETAILS

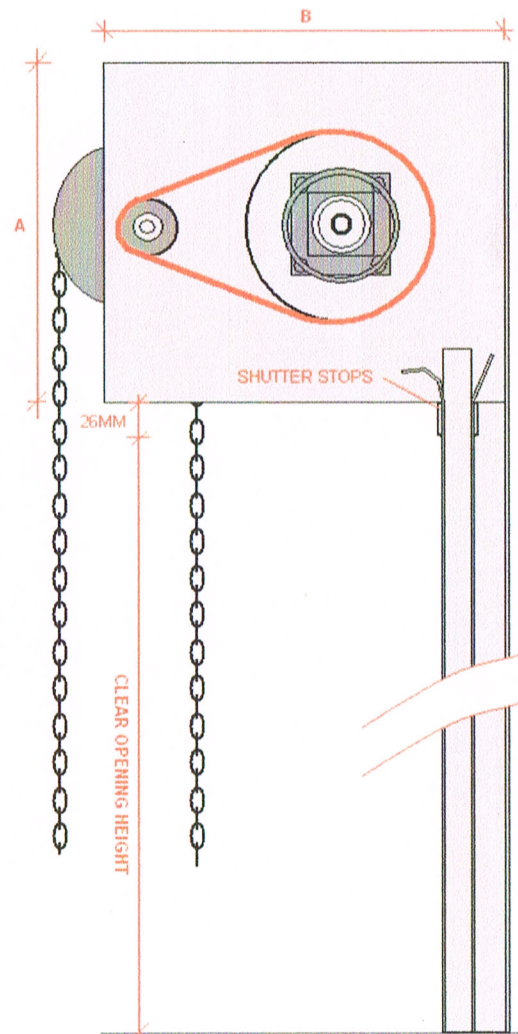

STANDARD DETAILS

LATHS
Laths rigidly constructed from galvanised cold rolled steel in 0.7mm material with 75mm curved face.

BOTTOM RAIL
Bottom rail is cold rolled from 1.6mm thick galvanised steel to BS2989 (1962) forming a rigid Tee section giving minimal lateral deflection

SIDE GUIDES
Side guide cold rolled from 3mm thick galvanised steel.

FINISH
Fully galvanised as standard or fully powdercoated to any standard ral colours

LOCKING
Via a chain keep bolted to the wall with a provision for a padlock (padlocks no provided).

NOTES

DRAWING TITLE

SINGLE REDUCTION MANUAL INDUSTRIAL ROLLER SHUTTER



flexibility is our strength

BIRMINGHAM GARAGE & INDUSTRIAL DOORS LTD
UNIT 3, 10 & 12
GRIFFIN INDUSTRIAL ESTATE
PENICRICKET LAKE
ROWLEY REGIS
WEST MIDLANDS
B65 0SH

TEL...0121 559 8666
FAX...0121 561 1101

CUSTOMER	OFFICE	CHECKED	APPROVED
	DATE	SCALE	SIZE
SITE	DRAWING NUMBER		REV.