

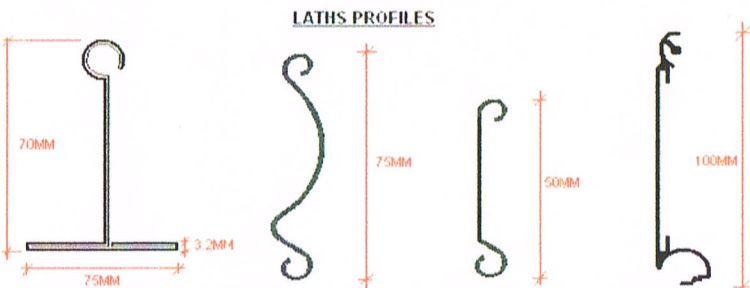
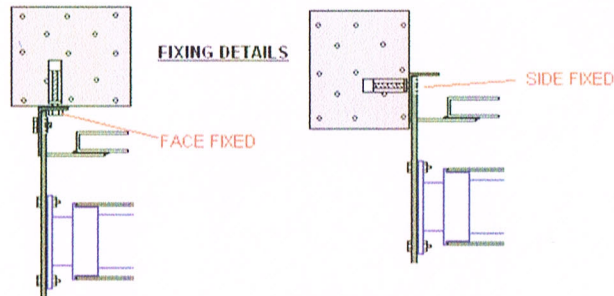



PLAN VIEW OF BARREL, MOTOR AND SAFETY BRAKE

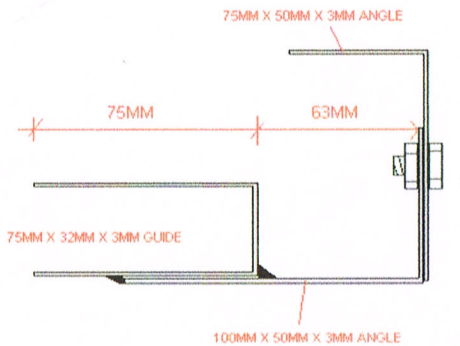

ENDPLATE SIZES	
CLEAR OPENING HEIGHT	A
0 - 1800MM	255MM
1801MM - 3000MM	305MM
3001MM - 4000MM	355MM

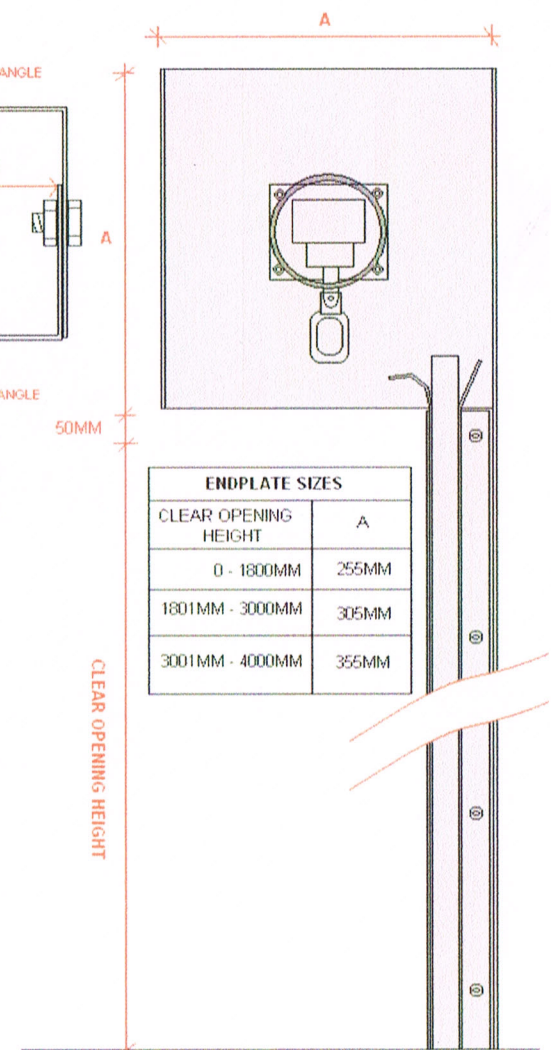

**DETAILS**

**LATHS**  
Laths rigidly constructed from galvanised cold rolled steel in 0.7mm material with 50mm or 75mm curved or flat face.  
Laths also come in extruded 50mm and 100mm aluminum sections and can be perforated or punched to allow ventilation or vision.

**BOTTOM RAIL**  
Bottom rail is cold rolled from 1.6mm thick galvanised steel to BS2989 (1982) forming a rigid Tee section giving minimal lateral deflection.

**SIDE GUIDES**  
Side guide cold rolled from 3mm thick galvanised steel.

**FINISH**  
Fully galvanised as standard or fully powdercoated to any standard rail colours.

**NOTES**

**DRAWING TITLE**  
STANDARD MOTORISED SHOP FRONT ROLLER SHUTTER.



BIRMINGHAM GARAGE & INDUSTRIAL DOORS LTD  
UNIT 3, 10 & 12  
GRIFFIN INDUSTRIAL ESTATE  
PEMBURGH LANE  
ROWLEY REGIS  
WEST MIDLANDS  
B65 0SH

TEL...0121 559 8666  
FAX...0121 561 1101

**WEIGHTS**  
**IN STEEL**  
**IN ALUMINIUM**

STANDARD STEEL BOTTOM RAIL	STANDARD 75MM X 20G STEEL CURVED LATH	STANDARD 50MM FLAT LATH	STANDARD 100MM ALLOY LATH
2.52KG PER MTR	12KG PER MTR SQ	10.08KG PER MTR SQ	8.78KG PER MTR SQ
		7.42KG PER MTR SQ	

CUSTOMER	DATE	CHECKED	APPROVED
	SITE		
DPA/BB/BOBEEF		PEV	